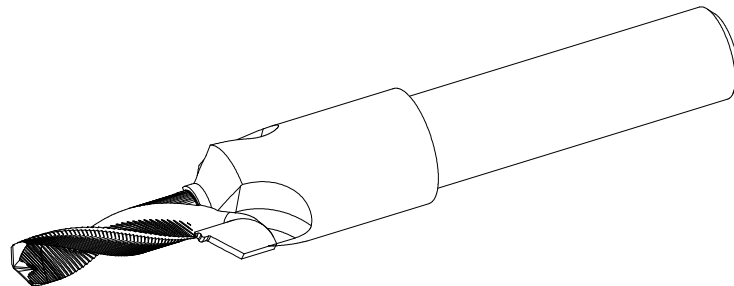




CVD CARBIDE Drill-C'sink/Bore (Inch)

Cutting Diameter (+.0006)	Shank Diameter (h6)	LOC (+/-0.03)	OAL (+.06)	Body Diameter (+/-0.01)	CSK Angle	cat#
0.165	1/4	acc request	acc request	0.375	100/130	CSDR165250I
0.191	3/8	acc request	acc request	0.500	100/130	CSDR191250I
0.251	5/16	acc request	acc request	0.625	100/130	CSDR251313I
0.3125	5/16	acc request	acc request	0.700	100/130	CSDR313313I



CVD Drill-countersink / counterbore			
Materials:	CARBIDE ; CVD	SCALE: NTS	<p>This drawing is The property of TELCON DIAMOND And may only be Copied or passed To a third party With our permission.</p>
CAT. NO.	By Table	 <p>Unless specified Tolerances are in Accordance with: DIN ISO 2768-m</p>	