




Cutting Diameter (+0.015)	Shank Diameter (h6)	LOC (+0.8)	OAL (+1.5)
0.30	3mm or 1/8	5.5	50
0.40	3mm or 1/8	5.5	50
0.45	3mm or 1/8	7	50
0.48	3mm or 1/8	7	50
0.50	3mm or 1/8	7	50
0.60	3mm or 1/8	7	50
0.75	3mm or 1/8	7	50
0.80	3mm or 1/8	7	50
1.00	3mm or 1/8	7	50

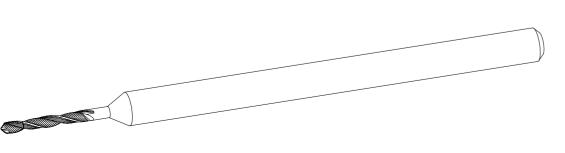

PCD Micro Drill	TELCON		
Materials:	SCALE: NTS	This drawing is	
CARBIDE ; PCD		The property of TELCON DIAMOND	
CAT. NO.	Unless specified Tolerances are in	And may only be Copied or passed	
By Table	Accordance with: DIN ISO 2768-m	To a third party With our permission.	