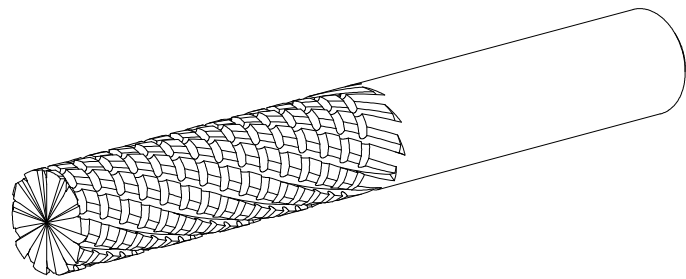




CVD Diamond Router *Emicon* (mm)

| Cutting Diameter (-0.05) | Shank Diameter (h6) | LOC (min) | OAL (+1.5) | # of flutes | Cat#          |
|--------------------------|---------------------|-----------|------------|-------------|---------------|
| 6                        | 6.00                | 25        | 63         | 8           | SCRT006006CVM |
| 8                        | 8.00                | 32        | 76         | 10          | SCRT008008CVM |
| 10                       | 10.00               | 35        | 76         | 12          | SCRT010010CVM |
| 12                       | 12.00               | 40        | 80         | 14          | SCRT012012CVM |



|  |               |  |   |
|--|---------------|--|---|
| <b>EMICON<br/>CVD DIAMOND<br/>ROUTER</b> |               |   |   |
| Materials:                               | Carbide ; CVD | SCALE: NTS   | <p>This drawing is<br/>The property of<br/><b>TELCON DIAMOND</b><br/>And may only be<br/>Copied or passed<br/>To a third party<br/>With our permission.</p> |
| CAT. NO.                                 | By Table      | <br>Unless specified<br>Tolerances are in<br>Accordance with:<br>DIN ISO 2768-m |   |